




The Magoye ripper can only be fitted to plough beams with rounded shanks.




The Magoye Ripper showing reversible tine and Sub-wings



Attaching the **sub-wings** to the ripper tine body. Always use the correct size spanner for the job! The **tine must be reversed** when it gets worn.

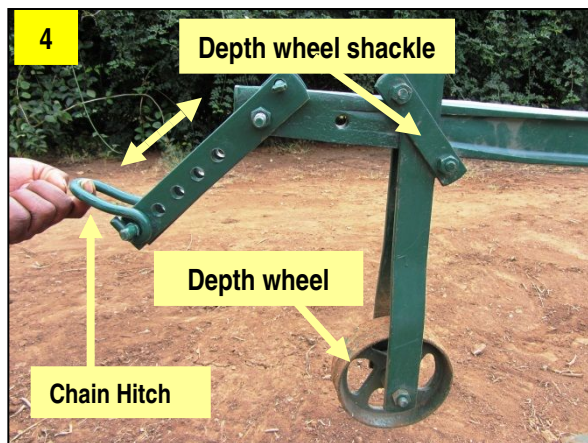

Make sure **depth wheel axle is not worn** and wheel rotates freely. Check **hitch and shackle bolts** are adjustable. Large depth wheels best.

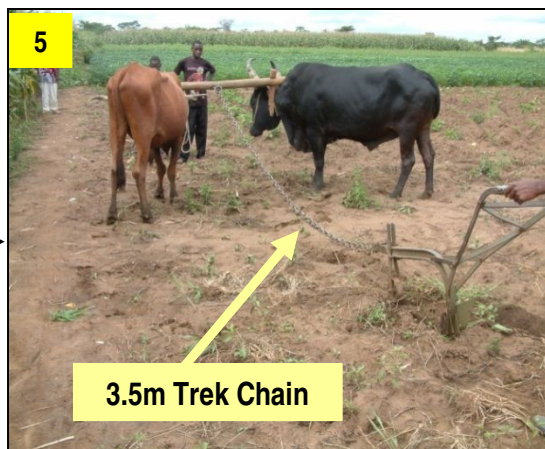

To rip properly the Trek chain needs to be **3.5 metres long**. Add if necessary.



Good ripping requires experience and skill. Furrows should be 90cms apart and straight. **Observation and adjustment makes perfect.**






Check ripping depth. Furrows should be about **15cms deep**.



If soils are **very hard** or **furrows have been trampled by cattle** a second ripping may be necessary to achieve depth.

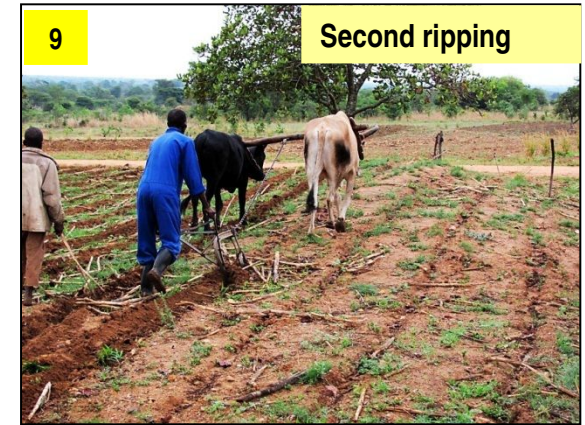

**Second ripping in progress** after early showers or just before planting.



If you have planted some crops that are harvested earlier than Maize or Cotton like **Cowpeas, Beans, or Soya Beans**, rip after harvesting when **soils are still a bit soft**.



In following years **always rip the same furrows** as you ripped in the previous year



**Have you thought of ripping for neighbours as a business?** Many farmers with rippers make money ripping for other farmers who have lost their oxen or don't have any.